



EXPANSION JOINT TO BE SPACED A MAXIMUM OF 20' APART  
OR AS DIRECTED BY THE ENGINEER TO MATCH CURB EXPANSION

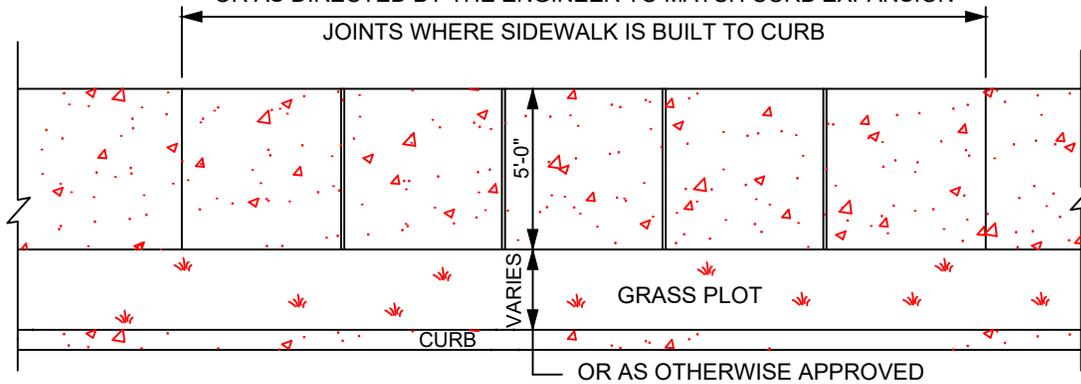

EXPANSION JOINT TO BE SPACED A MAXIMUM OF 20' APART  
DEPENDING ON MARKINGS, FIXED EXPANSION JOINTS AND JOINTS  
IN CURB WHERE SIDEWALK IS BUILT TO CURB

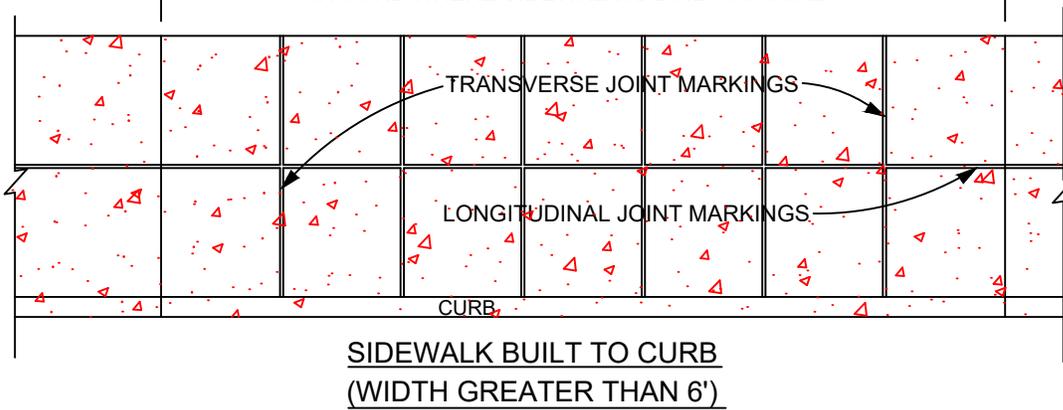

NOTE:  
SIDEWALKS SHALL BE 4" MIN. THICKNESS CLASS "A" CONCRETE



# STANDARD CONCRETE SIDEWALK

NOT TO SCALE

DRAWING NO.

4